


OPIE  
AUG 05 2004  
ENT & TRADEMARK OFFICE

AERRABOTU, ET AL.  
CS23688RL

1/6

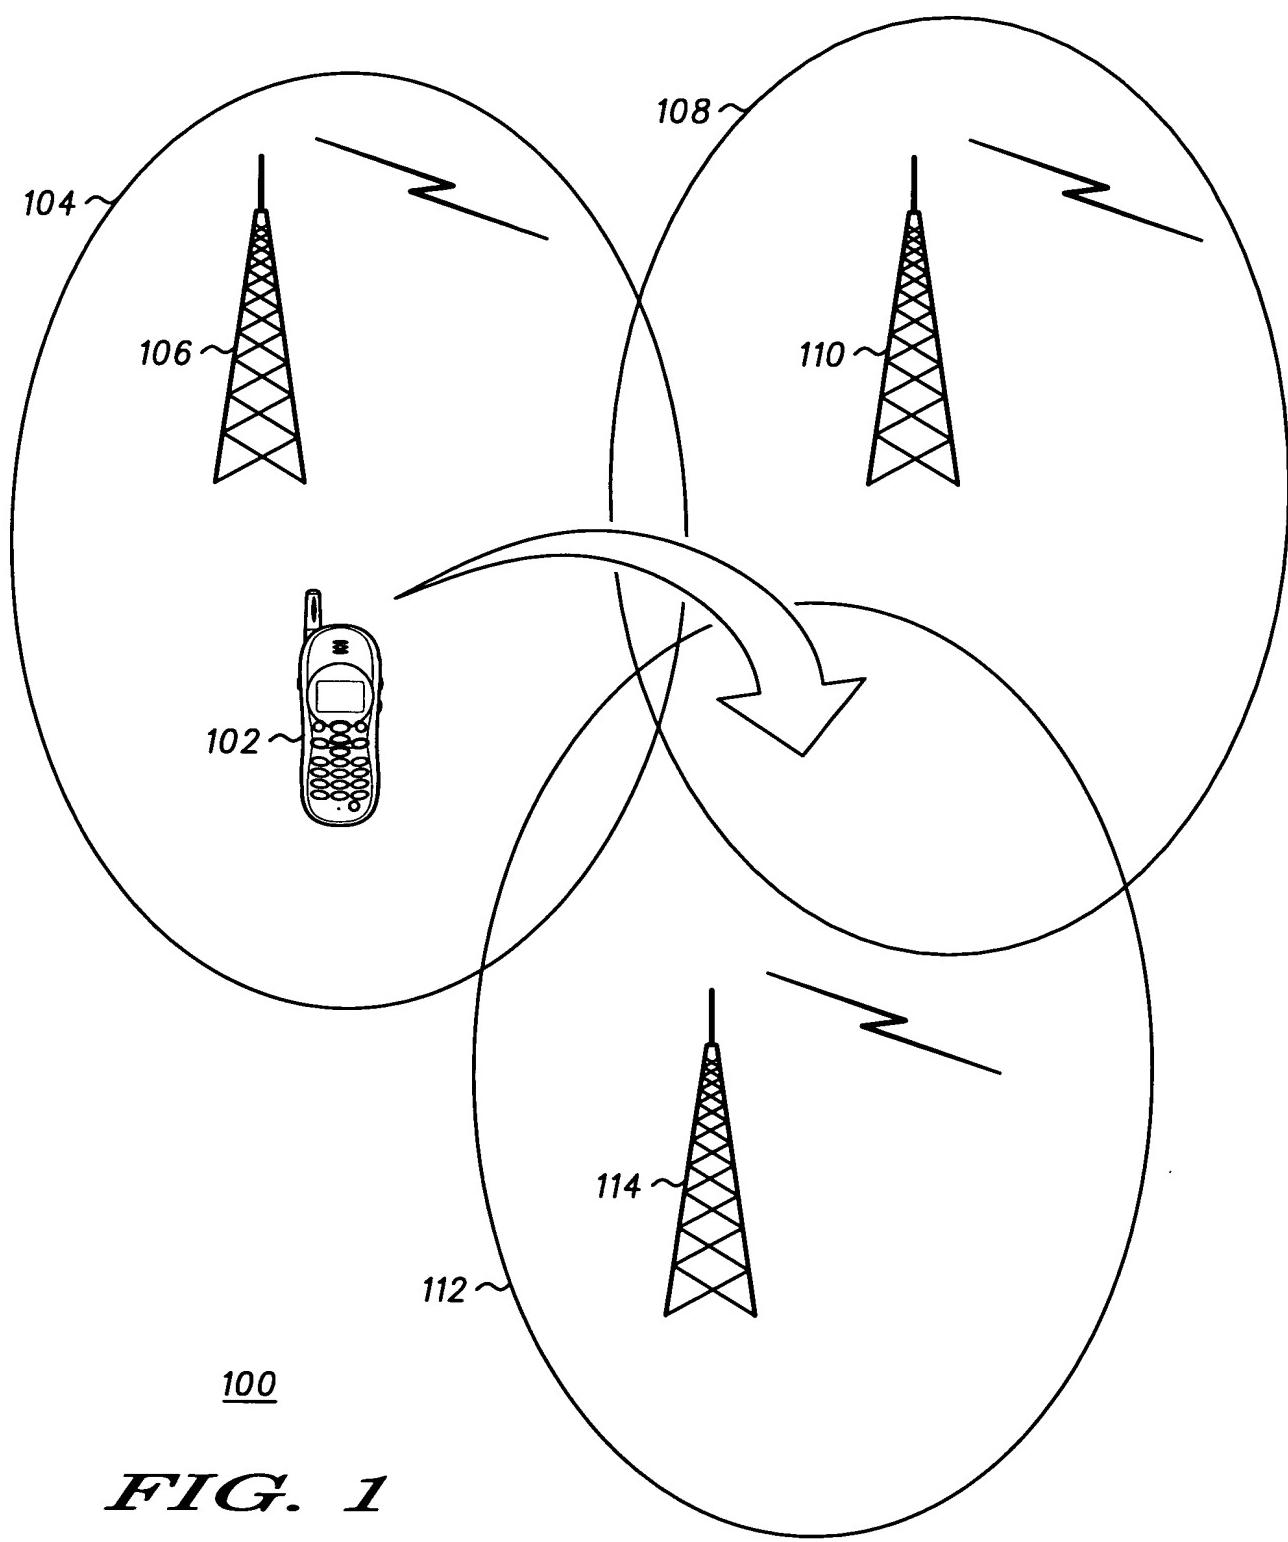

100

**FIG. 1**



2/6

200

202	206	204
SYSTEM IDENTIFIER	CARRIER IDENTITY	ERI
1	CARRIER A	2
2	CARRIER B	3
3	CARRIER C	1
4	CARRIER D	8
5	CARRIER X	6
6	CARRIER Y	10
•	•	•
•	•	•
•	•	•
N	CARRIER Z	200

*FIG. 2*

Γ

3/6


300

ERI	ACTION		
1	INDICATOR OFF		
2	INDICATOR ON		
3	INDICATOR FLASH		
4	ICON A		
5	ICON B		
6	ICON C		
•	•	•	•
•	•	•	•
•	•	•	•
200	TEXT BANNER 10		

*FIG. 3*

└

400

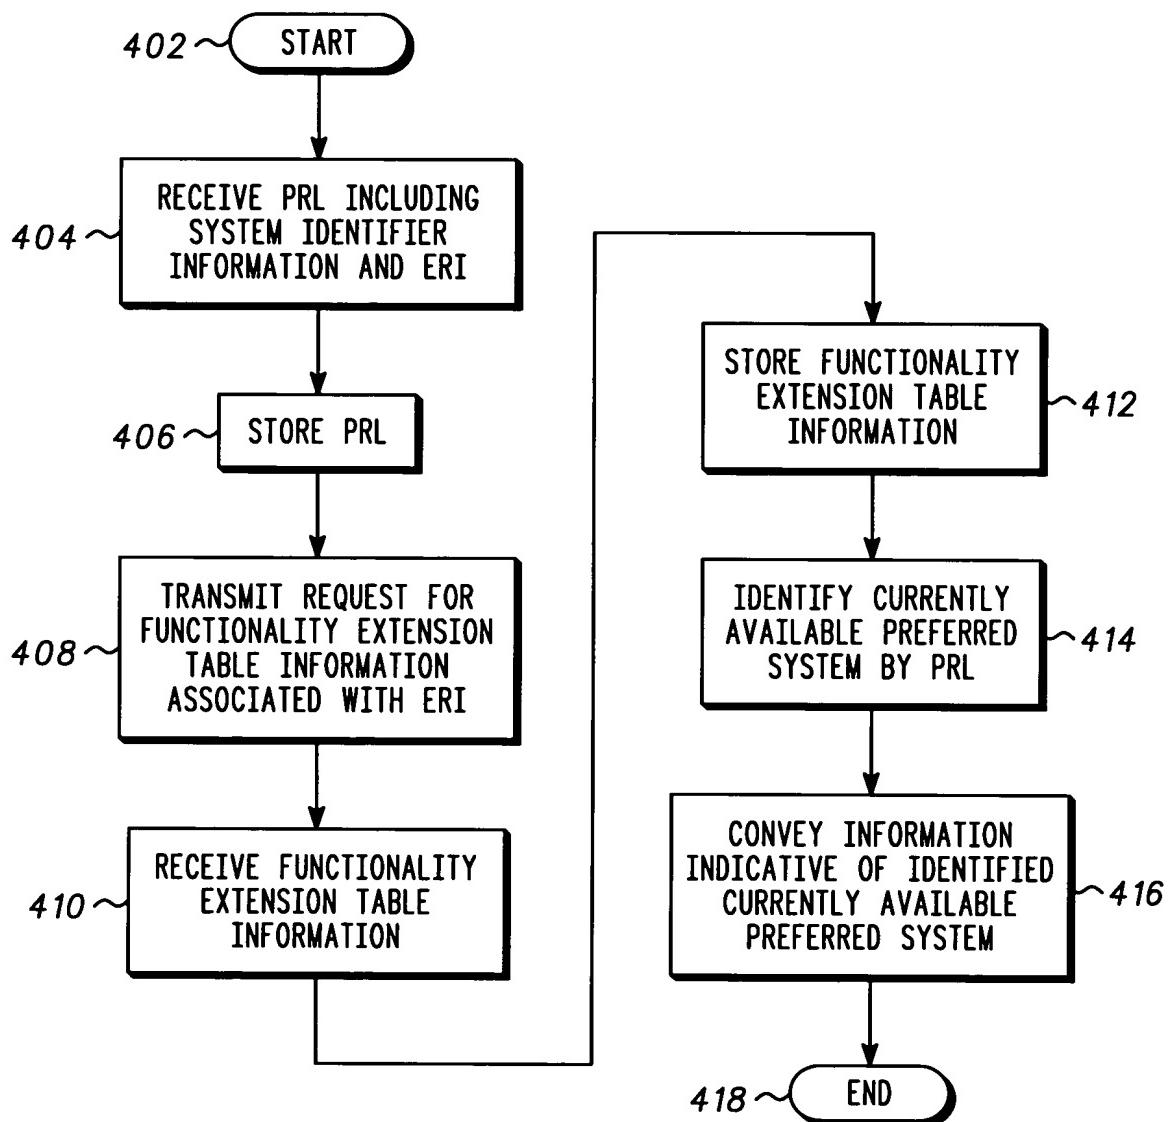

*FIG. 4*

5/6

FROM 412

414

502 ~ SCAN FOR CURRENTLY  
AVAILABLE SYSTEMS

504 ~ OBTAIN SYSTEM IDENTIFIERS OF  
CURRENTLY AVAILABLE SYSTEMS

506 ~ SELECT SYSTEM HAVING MOST  
PREFERRED STATUS IN SYSTEM  
IDENTIFIER INFORMATION IN PRL

TO 416

414

FROM 412

602 ~ MAP ERI AND SYSTEM  
IDENTIFIER INFORMATION INTO  
FUNCTIONALITY EXTENSION TABLE


*FIG. 6*

604 ~ SCAN FOR CURRENTLY  
AVAILABLE SYSTEMS

606 ~ OBTAIN SYSTEM IDENTIFIERS OF  
CURRENTLY AVAILABLE SYSTEMS

608 ~ SELECT SYSTEM HAVING MOST  
PREFERRED STATUS IN SYSTEM  
IDENTIFIER INFORMATION IN  
FUNCTIONALITY EXTENSION TABLE

TO 416

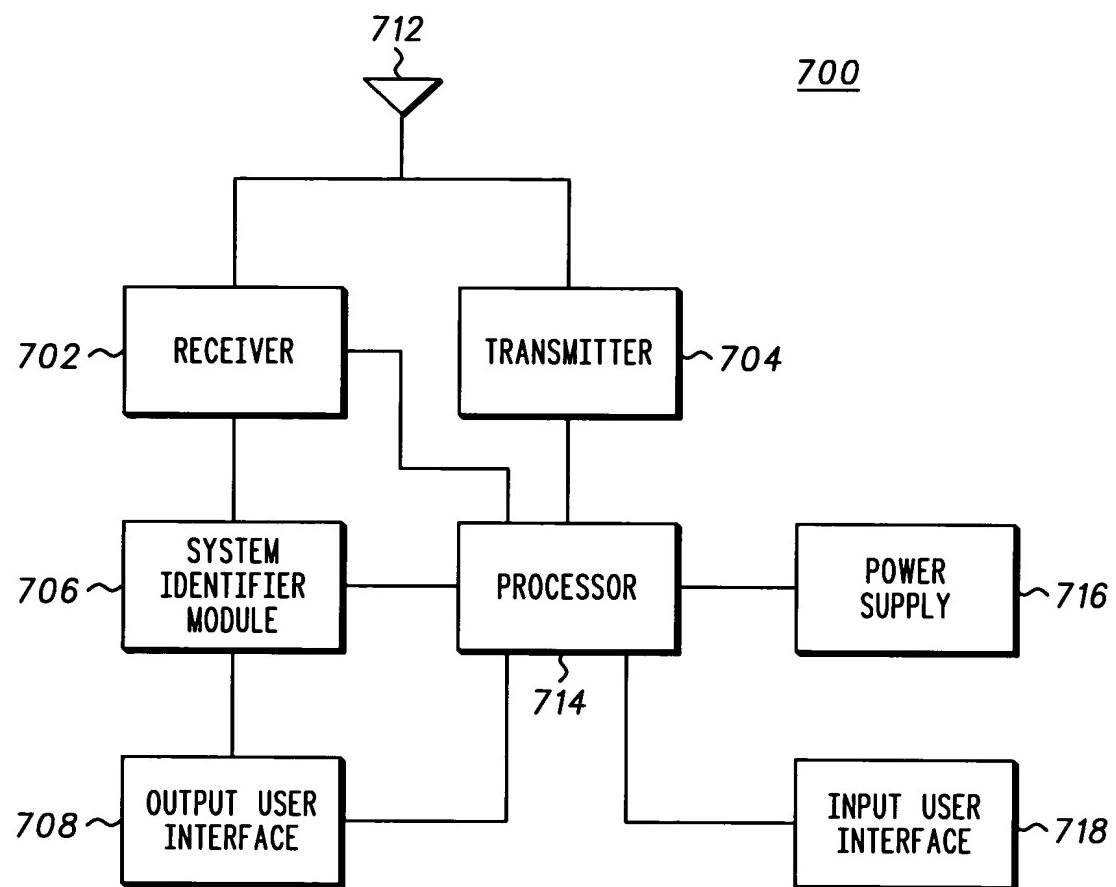

***FIG. 7***